



- Sensor support made from a section of a PVC tube of 2 cm outer diameter and length from 12 to 150 cm (or longer on request), dependent on the intended depth of the sensor installation.
- Available cable lengths from 1.5 to 6 m from the sensor to the terminating SMA connector.

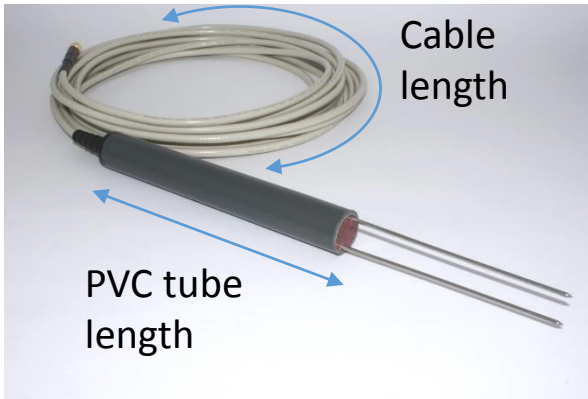

straight probe
order: option „s”

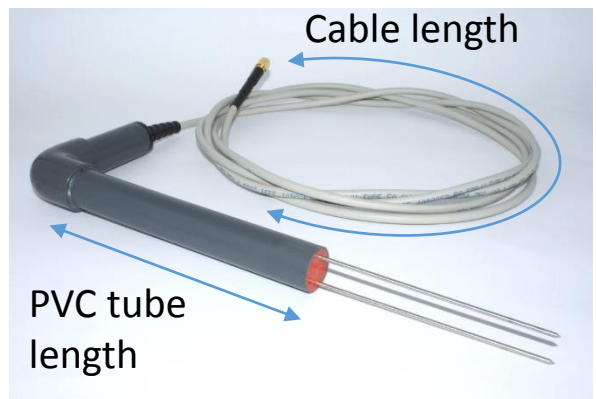

angle probe
order: option „a”

PRODUCT IDENTIFICATION SYSTEM

$\frac{FP}{ }$ Probe type	$\frac{/x}{ }$ Included sensors	$\frac{/x}{ }$ Probe shape	$\frac{/x}{ }$ PVC tube length	$\frac{/x}{ }$ Cable length	Examples: a) FP/mts/a/12/2.5 b) FP/ms/s/15/6.0 c) FP/mts/s/15/2.5 d) FP/mts/s/150/5.0
Probe type:	FP = Field Probe				
Included sensors:	ms = moisture and electrical conductivity (salinity) mts = moisture, temperature and electrical conductivity (salinity)				
Probe shape	s = straight probe a = angle probe				
PVC tube length	12 = tube 12cm length (STANDARD) available nonstandard PVC tube lengths from 12 to 150 cm every 5 cm				
Cable length	2.5 = cable length in meter (STANDARD) available nonstandard cable lengths from 1.5 to 6 m every 0.5m				
Warning: the cable length includes the PVC tube length and the bend length					